



STREET LIGHT SERIES

XLD-L017A




● Structural characteristic

1. Housing cast by 700t die-cast machine, featuring high strength, compact structure and smooth profile
2. Reflector is made of high purity aluminum plate anodized, polished
3. High-transparent toughened glass shade, 5mm thickness, arc-shaped, heat resistant
4. Stainless steel buckle with spring for operation, top-lift cover for easy maintenance
5. Internal bulb-replacement structure for excellent water-and dust-proof property

● Technical Parameters



1. Protection rating: IP65
2. Housing's anti-corrosion property: class II
3. Working environment: $-35^{\circ}\text{C} \sim +45^{\circ}\text{C}$
4. Lampholder: E27 E40
5. Electric shock-proof rating: class I
6. Power source: 220V ($\pm 10\%$)/50Hz
7. Lamp: 70W-250W high pressure sodium/metal halide bulb

● Dimensions(mm)

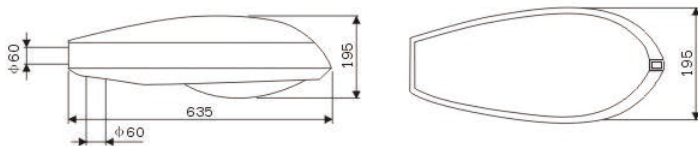

● Photometric Data

Light Distribution Curve C0/C180

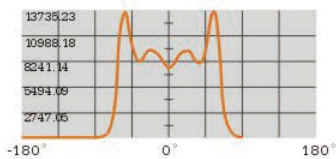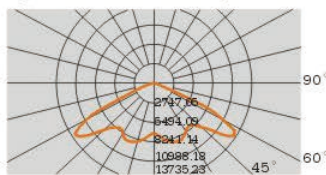

Light Distribution Curve C90/C270

