



STREET LIGHT SERIES

XLD-L016B




● Structural characteristic

1. Housing cast by 700t die-cast machine, featuring high strength, compact structure and smooth profile
2. Reflector is made of high purity aluminum plate anodized, polished
3. Stainless steel buckle with spring for operation, top-lift cover for easy repair and maintenance
4. Internal bulb-replacement structure for excellent water-and dust-proof property
5. Toughened glass shade of high strength and transparency

● Technical Parameters

1. IP rating:
Control gear compartment: IP54
Optical compartment: IP65
2. Housing's anti-corrosion property: class II
3. Working environment: $-35^{\circ}\text{C} \sim +45^{\circ}\text{C}$
4. Lampholder: E27 E40
5. Electric shock-proof rating: class I
6. Power source: $220\text{V}(\pm 10\%)/50\text{Hz}$
7. Lamp: 70W-400W high pressure sodium/metal halide bulb

● Dimensions(mm)

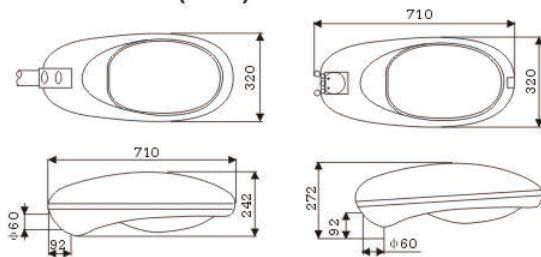

● Photometric Data

