

# LED Post light



## ● 产品特点 Product Features

1. 采用XLD-MU-004标准光模块,防护等级达IP66。Adopt XLD-MU-004 module, protection level reach IP66.
2. 整体式后盖设计,满足防沙尘、防虫功能。Integral design canopy prevent entry of dust&sand.
3. 恒流电源具备IP67防护、4 kv防雷、过温度保护,过电压保护。Constant current driver features IP67 protection,4KV lightning proof, over temperture protection,over voltage protection.
4. 不含卤素、铅及汞等有害物质,完全符合欧盟ROHS规范。Free of halogen, lead and mercury, fully ROHS compliant.

## ● 应用场所 Applications

适用于公园、广场、住宅区等户外活动场所。 Park,Square,Residential community and etc.


## ● 规格 Specification

型号/Model	XLD-LEDT104-XX30	XLD-LEDT104-XX40
功率/Power	30W	40W
LED光模块 LED Light module	XLD-MU-004	
工作电压 Working voltage	AC 85~305V 50/60Hz	
光效 Luminous efficacy	≥95 lm/w	
使用寿命 Working life	50,000h	
电源效率 Power efficiency	≥88%	
功率因数 Power factor	>0.95	
防护等级 IP rating	IP65	
工作环境温度 Working temperature	-20~50°C	
产品重量 Product weight	5.0KG	

\*产品标准色温为4300K,显指为Ra≥70。  
Standard color temperature 4300K,Ra≥70

\*以上参数为参考值,部分参数实际存在的误差。  
Above parameters for reference only, tolerance exist for partial parameters

## ● 结构尺寸 Dimensions(mm)

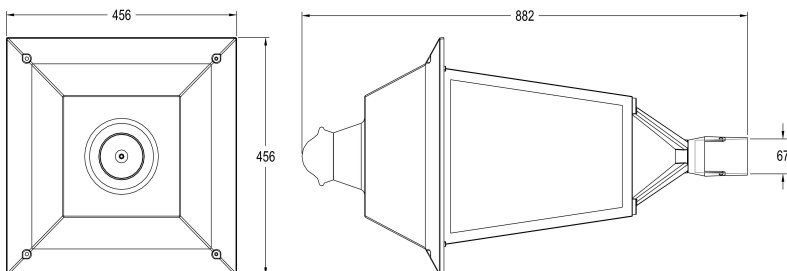

## ● 配光曲线 Photometric data

